



### CM-75

### 36" & 9" PUSH PLATE SWITCHES



#### FEATURES

- HEAVY DUTY CONSTRUCTION, ADA COMPLIANT
- LOW PROFILE CONTOURED DESIGN WITH EASY ACTIVATION FROM SIDE ANGLES
- EXCEEDS CALIFORNIA BUILDING CODE, SECTION 1117B.6 REQUIREMENTS
- OVER 94 SQUARE INCHES TOTAL ACTIVATION AREA (CM-7536)
- (2) FULLY REDUNDANT SPDT, 15 AMP, UL LISTED SWITCHES (CM-7536)
- CHOICE OF CLEAR ALUMINUM AND DARK BRONZE ARCHITECTURAL FINISHES
- CHOICE OF 4 DIFFERENT STOCK GRAPHICS
- OPTIONAL 'SNAP-IN' LAZERPOINT RF™ WIRELESS TRANSMITTERS
- ADJUSTABLE LEVELING SCREWS FOR EASY INSTALLATION ON UNEVEN WALLS
- NO INTERNAL WIRES EXPOSED TO MOVING PARTS

#### DESCRIPTION

**CAMDEN DOOR CONTROLS CM-75 Series Column™** push plate switches offer the latest word in rugged and attractive ADA compliant switch design that are easy to install (wired or wireless), easy to activate (from any angle) and provide years of trouble free operation. CM-75 are the only models in the industry that provide (2) fully redundant, heavy duty, 15 Amp switches. The switch components are UL Listed.

With a profile of less than 1.5" (38mm), Column™ push plate switches offer an elegant design that is both attractive and offers easier activation. Models are available in anodized aluminum finish (epoxy printed blue graphics) or dark bronze anodized finish (epoxy printed white graphics).

The innovative end caps are made of impact and flame resistant polycarbonate, designed for easy 'snap-in' installation and service of Lazerpoint RF™ wireless transmitters and batteries. There is an option for a factory installed wireless transmitter.

#### APPLICATION

Camden Door Controls, Column™ series push plate switches are ADA compliant and exceed the requirements of the California Building Code, Section 1117B.6., where activation switches for automatic doors are located not more than 48 inches (1219 mm) nor less than 15 inches (381 mm) to the level of a finish floor or working platform. CM-75 Column™ switches are designed to eliminate the need to install two activation switches to meet this code requirement.

CM-75 Column™ switches are easily mounted on exterior or interior surfaces and offer 4 leveling screws to accommodate uneven walls, such as brick or concrete. For installations that require an exterior freestanding switch, CM-75 series switches are compatible with color matched Camden CM-42 and CM-48 Series anodized aluminum and dark bronze bollards.

The (2) fully redundant SPDT momentary switches rated 15 Amps, are hardwired to the automatic door controller, or to a field or factory installed Lazerpoint RF™ CM-TX-9 transmitter. Lazerpoint RF™ transmitters offer superior range, stuck switch alarm, battery test gauge and up to 500,000 activations utilizing standard AAA alkaline batteries.



CM-7536/4



CM-7536/4BRZ



CM-7509/4

KEY SWITCHES

PUSH BUTTONS

MOUNTING OPTIONS

RF CONTROLS

HANDS-FREE SWITCHES

SPECIAL PURPOSE SWITCHES

KEYPADS


ACCESSORIES

## 36" & 9" PUSH PLATE SWITCHES




### SPECIFICATIONS

DIMENSIONS	CM-7536	37 1/2" H X 5 7/8" W X 1 1/2" D OVERALL (952 MM x 150 MM x 38 MM)
	CM-7509	10 5/8" H X 5 7/8" W X 1 1/2" D OVERALL (270 MM X 150 MM X 38 MM)
CONSTRUCTION		HEAVY DUTY EXTRUDED ALUMINUM
FINISH	CM-75	ANODIZED CLEAR ALUMINUM
	CM-75/BRZ	ANODIZED DARK BRONZE
OPERATING VOLTAGE		12 OR 24V AC/DC
CONTACT TYPE	CM-7536	(2) SPDT MOMENTARY, FORM 'C'
	CM-7509	(1) SPDT MOMENTARY, FORM 'C'
CONTACT RATING		15 AMPS @ 30V
COMPLIANCE		UL LISTED SWITCH COMPONENTS, ADA COMPLIANT, MEETS CALIFORNIA STATE BUILDING CODE, 1117B.6
OPTIONAL WIRELESS		'SNAP-IN' LAZERPOINT RF™ WIRELESS TRANSMITTER (SEE SEPARATE SPEC SHEET FOR DETAILS)

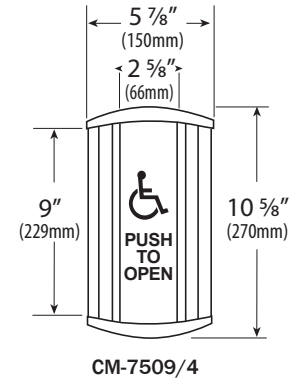

### ORDERING INFORMATION

MODEL	DESCRIPTION
<b>CLEAR ALUMINUM ANODIZED FINISH</b>	
<b>36" MODELS</b>	
CM-7536/1	36" LONG, NO GRAPHICS
CM-7536/2	36" LONG, WHEELCHAIR SYMBOL ONLY
CM-7536/3	36" LONG, 'PUSH TO OPEN'
CM-7536/4	36" LONG, 'PUSH TO OPEN' AND WHEELCHAIR SYMBOL
<b>9" MODELS</b>	
CM-7509/2	9" LONG, WHEELCHAIR SYMBOL ONLY
CM-7509/4	9" LONG, 'PUSH TO OPEN' AND WHEELCHAIR SYMBOL
<b>DARK BRONZE ANODIZED FINISH</b>	
CM-7536/1BRZ	36" LONG, NO GRAPHICS
CM-7536/2BRZ	36" LONG, WHEELCHAIR SYMBOL ONLY
CM-7536/3BRZ	36" LONG, 'PUSH TO OPEN'
CM-7536/4BRZ	36" LONG, 'PUSH TO OPEN' AND WHEELCHAIR SYMBOL
<b>CM-75 WITH FACTORY INSTALLED WIRELESS TRANSMITTER</b>	
/TX	LAZERPOINT RF™ 915MHZ. TRANSMITTER WITH BATTERIES, SUFFIX 'TX' TO ABOVE MODEL NUMBERS
<b>COMPATIBLE 48" AND 42" TALL BOLLARDS (MOUNTING POSTS)</b>	
CM-48-DSU-CLR	48" EXTRUDED ALUMINUM BOLLARD, CLEAR ALUMINUM FINISH
CM-48-DSU-BRZ	48" EXTRUDED ALUMINUM BOLLARD, DARK BRONZE FINISH
CM-42-DSU-CLR	42" EXTRUDED ALUMINUM BOLLARD, CLEAR ALUMINUM FINISH
CM-42-DSU-BRZ	42" EXTRUDED ALUMINUM BOLLARD, DARK BRONZE FINISH

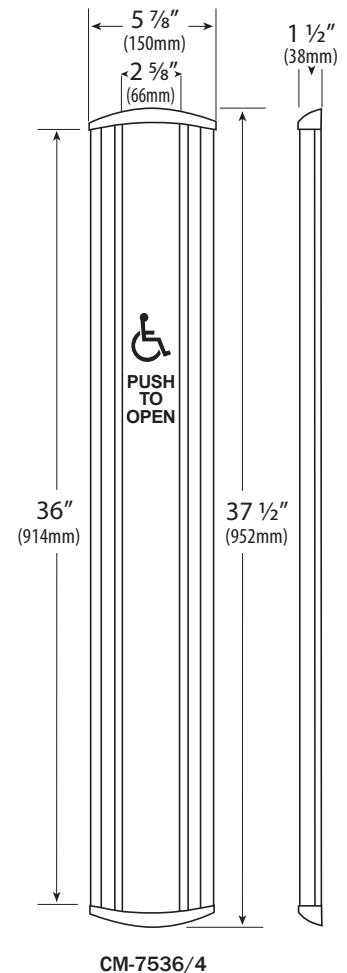

Contact factory for custom CM-75 switch orders including different lengths, finishes, graphics and LED indicators.



5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 • Toll Free: 1 877 226-3369 (CAMDEN9)  
Tel: (905) 366-3377 • Fax: (905) 366-3378 • E-mail: [info@camdencontrols.com](mailto:info@camdencontrols.com) • [www.camdencontrols.com](http://www.camdencontrols.com)

LIT-SP-COL75



Certified ISO 9001:2008

FS 541752